
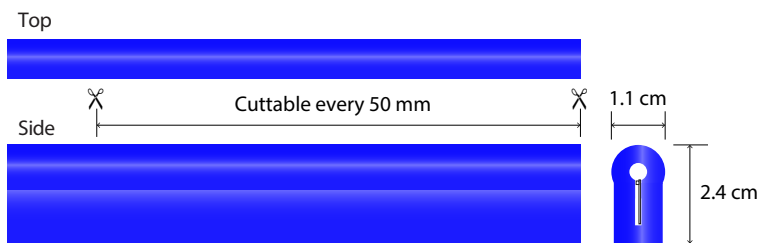




**JOB#**

Indoor/ Outdoor  Saltwater resistant | Dimmable | High CRI (+85) | UV Protected Silicone Jacket  
Cuttable every 50 mm | V2 Flame retardants | Brightest LED Neon Available

## 24V LED Neon Flex





### 10M (32.8') length Single Ended Power

LS-NF-24-10-XX  
24V DC, 9.6W/M (2.9W/FT)  
2700k, 3000k, 4100k, 6500k  
Red, Green, Blue, Yellow  
585lms/M, CRI +85  
2" (50mm) cut lengths

### Custom MAX length with Single Ended Power: 50 ft. Double Ended Power: 100 ft.

LS-NF-24-C-XX  
24V DC, 9.6W/M (2.9W/FT)  
2700k, 3000k, 4100k, 6500k  
Red, Green, Blue, Yellow  
585lms/M, CRI +85  
2" (50mm) cut lengths

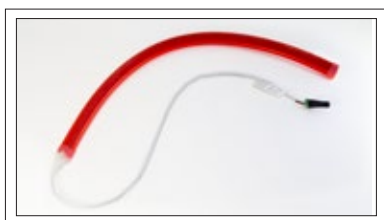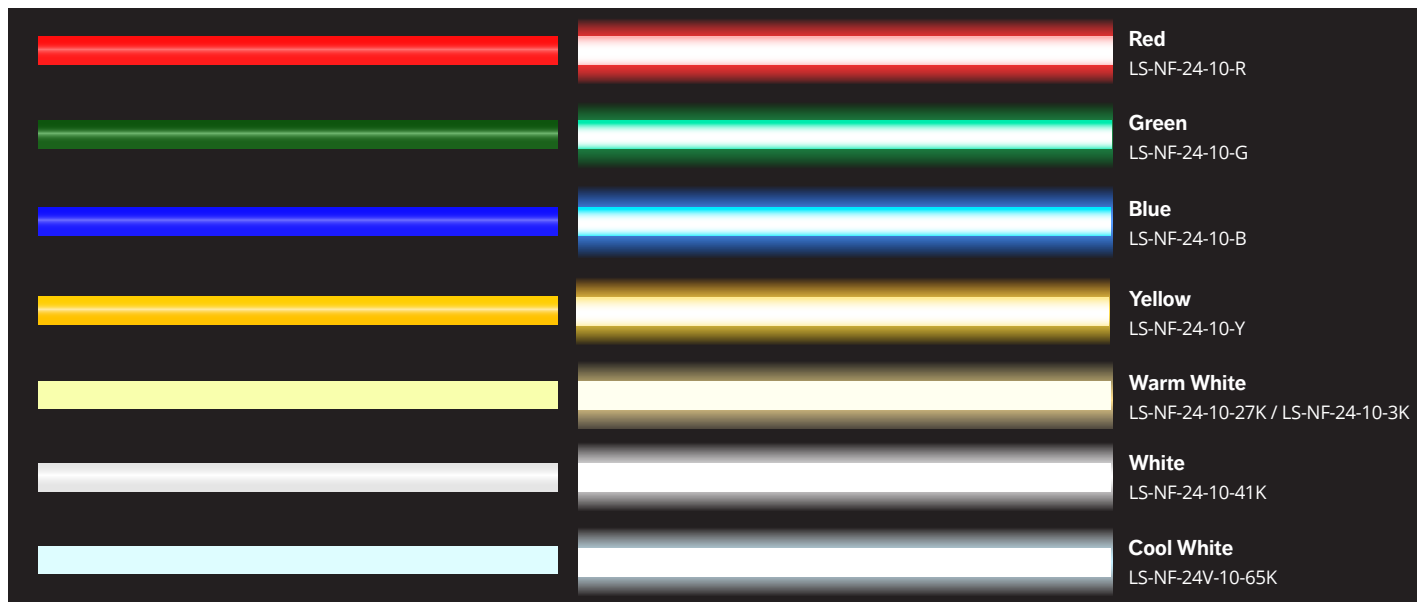


### 2FT Sample Neon available

LS-NF-24-2FT-XX  
Available in 2700k, 4100k, 6500k,  
Red, Green, Blue, RGB


Custom color temperatures  
available.




## Mounting and Installation Accessories

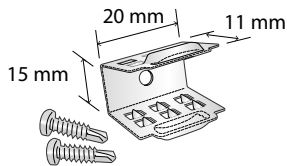


Clip **CL** CODE: LS-NF-SLMC

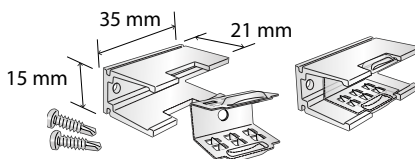


Aluminum mount with clip **MC** CODE: LS-NF-MC

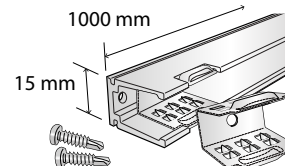


1M Aluminum channel with 2x clip CODE: LS-NF-AP




Power plug - bottom feed CODE: LS-NF-BEPF

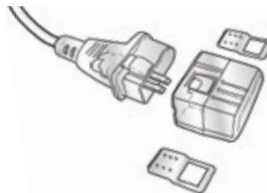


Power plug - inline feed **IP** CODE: LS-NF-EEPF



End cap CODE: LS-NF-EC




Inline connector **IC** CODE: LS-NF-IC

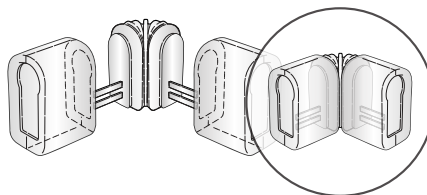

Corner connector **CC** CODE: LS-NF-CC



Wire

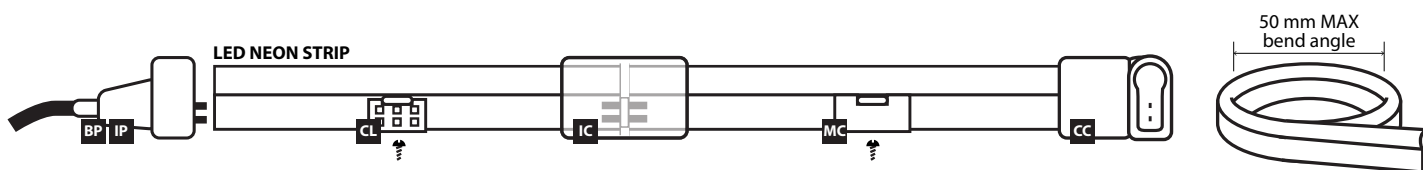

## 24V DRIVERS

		SKU	VOLTAGE	WATTAGE	OUTPUT	DIMENSIONS	WIRING:	
24V NON DIMMING DRIVERS		60W LED Power Supply	LS-24V-60W-CV	120V AC (50/60Hz)	60W MAX Class 2	24V DC 2.5A	L4 <sup>1/2</sup> x W2 x H1 in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> INDOOR
		96W LED Power Supply	LS-24V-96W-CV	120V AC (50/60Hz)	96W MAX Class 2	24V DC 4A	L7 <sup>1/2</sup> x W3 x H3 <sup>1/2</sup> in.	<input checked="" type="checkbox"/> PLUG <input checked="" type="checkbox"/> OUTDOOR
		150W LED Power Supply	LS-24V-150W-O-CV	100-265V AC (50/60Hz)	150W MAX Class 2	24V DC 6.25A	L9 <sup>7/16</sup> x W2 <sup>13/16</sup> x H1 <sup>3/4</sup> in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> INDOOR
		240W LED Power Supply	LS-24V-240W-O-CV	100-277V AC (50/60Hz)	240W MAX	24V DC 16A	L8 <sup>7/8</sup> x W2 <sup>15/16</sup> x H1 <sup>5/8</sup> in.	<input checked="" type="checkbox"/> PLUG <input checked="" type="checkbox"/> OUTDOOR
DIMMABLE DRIVERS		60W Dimmable LED Power Supply	LS-12V-60D-CV	120V AC (60Hz)	60W MAX Class 2	12V DC 5A	L7 <sup>1/8</sup> x W2 <sup>3/8</sup> x H1 <sup>3/8</sup> in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> INDOOR
		96W Electronic Dimmable LED Power Supply	LS-24V-96DM-CV	120V AC (60Hz)	60W MAX	12V DC 4A	L15 x W3 x H2 <sup>1/4</sup> in.	<input checked="" type="checkbox"/> PLUG <input checked="" type="checkbox"/> OUTDOOR