



JOB# _____

LED LL50 LINKABLE LINEAR BAR LIGHTS
for even light output with no hot spots.

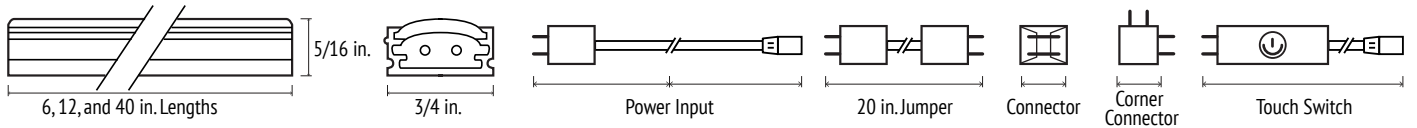

CHOOSE LIGHT COLOUR		CALCULATIONS		CHOOSE ACCESSORIES / INDICATE QUANTITY			
<p>6 in. Linear bar W1-3/16" x H7/16" Includes surface mount hardware (2 clips)</p>	<input type="checkbox"/> 3000K Warm White LS-LL50-6-3K	VOLTAGE: 24V DC WATTAGE: 3W MAX RUN: 90W LUMENS: 225	WATTS: 3 × QTY: = TOTAL WATTAGE:	 Power Input LS-LL50-IP QTY:	 Touch Switch LS-LL50-TS QTY:	 Jumper LS-LL50-JC QTY:	
	<input type="checkbox"/> 4000K Natural White LS-LL50-6-4K						
<p>12 in. Linear Bar W1-3/16" x H7/16" Includes surface mount hardware (2 clips)</p>	<input type="checkbox"/> 3000K Warm White LS-LL50-12-3K	VOLTAGE: 24V DC WATTAGE: 5W MAX RUN: 90W LUMENS: 410	WATTS: 5 × QTY: = TOTAL WATTAGE:	 Corner Connector LS-LL50-CC QTY:	 45° Clip LS-LL50-AC QTY:	 Connector LS-LL50-MC QTY:	 3M Tape LS-LL50-3M QTY:
	<input type="checkbox"/> 4000K Natural White LS-LL50-12-4K						
<p>40 in. Linear Bar W1-3/16" x H7/16" Includes surface mount hardware (2 clips)</p>	<input type="checkbox"/> 3000K Warm White LS-LL50-40-3K	VOLTAGE: 24V DC WATTAGE: 15W MAX RUN: 90W LUMENS: 1100	WATTS: 15 × QTY: = TOTAL WATTAGE:				
	<input type="checkbox"/> 4000K Natural White LS-LL50-40-4K						

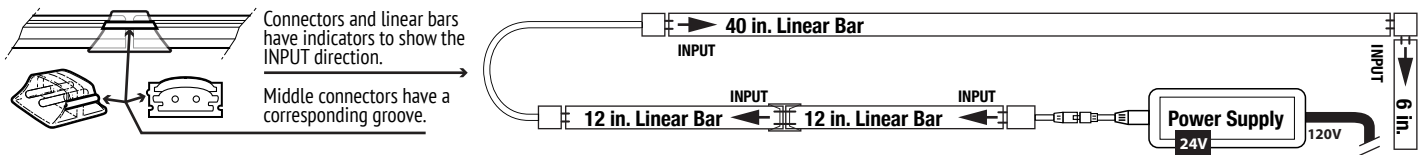

POWER SUPPLIES (CLASS 2) contact us for larger power supplies

ADD 10% TO THE TOTAL WATTAGE FROM LED LIGHT SELECTION TABLE ABOVE (WATTS X QTY = TTL WATTAGE) +10% = Required Wattage of Power Supply

ie: ((4x 12 in. Linear Bars =20W) + (2x 40 in. Linear Bars =30W)) +10% =55W. A 60W 24V DRIVER IS REQUIRED.

	LENGTH(S)	SKU	VOLTAGE	WATTAGE	OUTPUT	DIMENSIONS	WIRING	CALCULATIONS	QUANTITY
NON DIM	60W 24V LED Power Supply	24V-60W-Driver	120V AC in 24V DC out	60W MAX Class 2	24V DC	L4 1/2 in. W2 in. H1 in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> PLUG		
NON DIM	120W 24V LED Power Supply	24V-120W-Driver	120V AC in 24V DC out	120W MAX	24V DC	L7 1/2 in. W3 in. H3 1/2 in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> PLUG		
DIMMING	60W Dimmable 24V LED Power Supply	24V-60W-Dim-CV	120V AC in 24V DC out	60W MAX Class 2	24V DC	L4 3/8 in. W1 13/16 in. H0 51/64 in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> PLUG		
DIMMING	96W Dimmable 24V LED Power Supply	24V-96W-Dim-CV	120V AC in 24V DC out	96W MAX Class 2	24V DC	L6 3/32 in. W2 1/8 in. H0 51/64 in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> PLUG		