
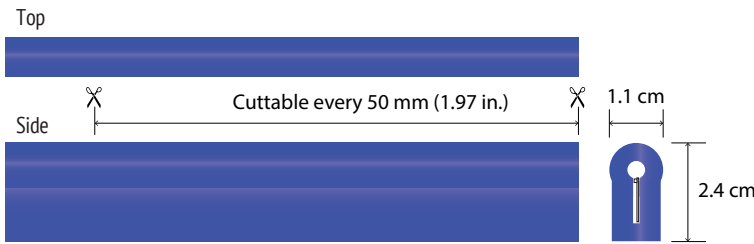




JOB#

Indoor/Outdoor  Saltwater resistant | Dimmable | High CRI (+85) | UV Protected Silicone Jacket
Cuttable every 50 mm | V2 Flame retardants | Brightest LED NEON Available

24V LED Neon Flex




**10M (33 ft.) lengths
Single ended power**


LS-NEON-24V-10-XX
24V DC, 3W / Foot 9.6W / Meter
WW/WH/BL/GR/PL/RE/OR/YL
Lumens: 585/M (Warm White 3000K)
Cut Lengths: 1.97" (50mm)

**Custom MAX length with
Single Ended Power: 50 ft.
Double Ended Power: 100 ft.**


LS-NEON-24V-CUSTOM
24V DC, 3W / Foot 9.6W / Meter
WW/WH/BL/GR/PL/RE/OR/YL
Lumens: 585/M (Warm White 3000K)
Cut Lengths: 1.97" (50mm)

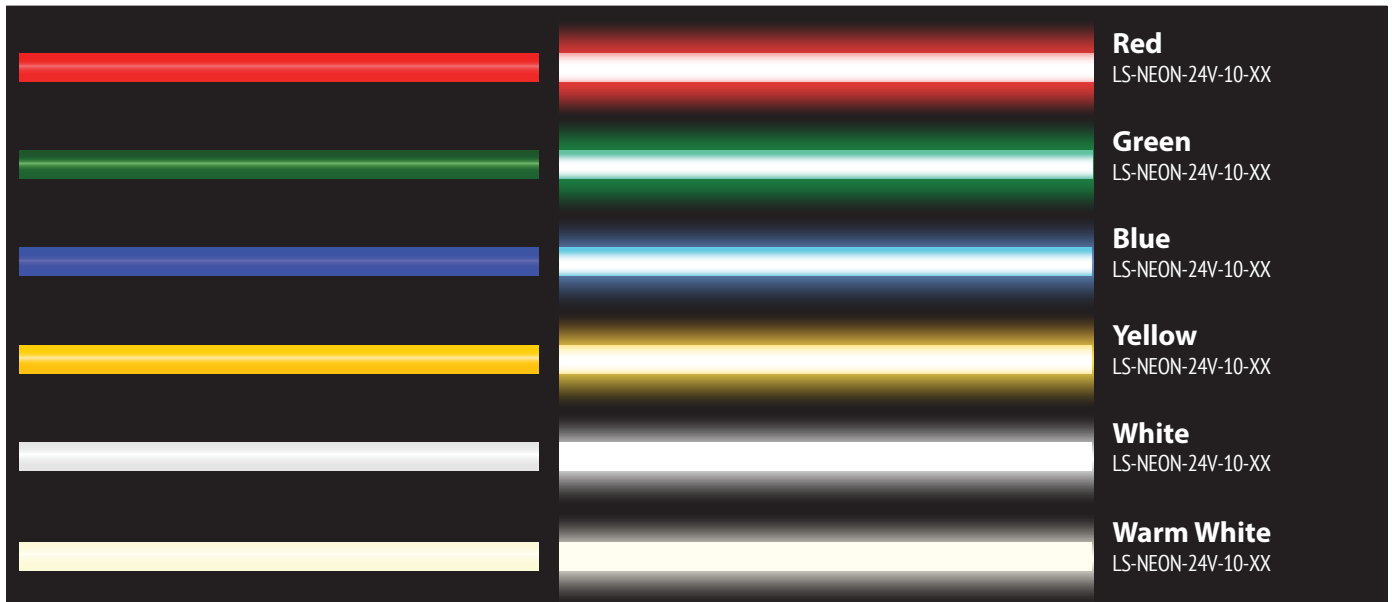


Mounting and Installation Accessories

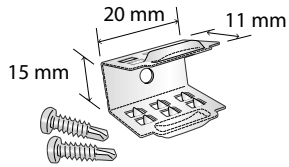


Clip **CL** CODE: LS-NF-MC

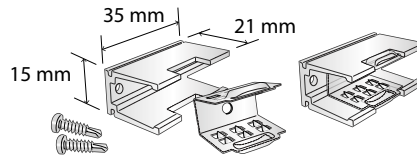


Aluminum mount with clip **MC** CODE: LS-NF-SLMC

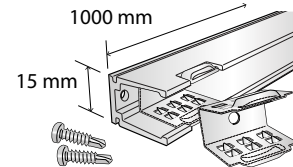


1M Aluminum channel with 2x clips CODE: LS-NF-AP




Power plug - bottom feed CODE: LS-NF-BEPF

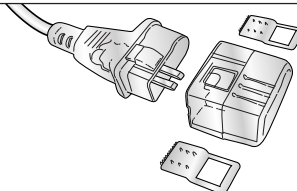


Power plug - inline feed **IP** CODE: LS-NF-EEPF



End cap CODE: LS-NF-EC





Inline connector **IC** CODE: LS-NF-IC

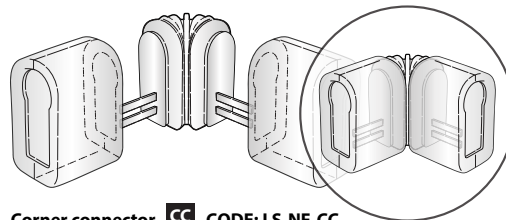

Corner connector **CC** CODE: LS-NF-CC



Wire

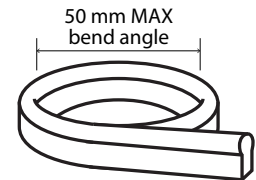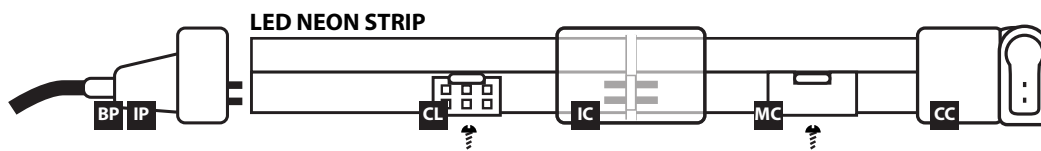

24V NON-DIMMING DRIVERS

	SKU	VOLTAGE	WATTAGE	OUTPUT	DIMENSIONS	WIRING:
	LS-60W-24-CV	120V AC	60W MAX Class 2	24V DC	L4.5 x W2.0 x H1.0 in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> INDOOR <input checked="" type="checkbox"/> PLUG <input type="checkbox"/> OUTDOOR
	LS-120W-24-CV	120V AC	120W MAX	24V DC	L7.5 x W3.0 x H3.5 in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> INDOOR <input checked="" type="checkbox"/> PLUG <input type="checkbox"/> OUTDOOR
	LS-240W-24V-0	100-244V /277V AC	240W MAX	24V DC	L9.6 X W2.70 X H1.54 in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> INDOOR <input type="checkbox"/> PLUG <input checked="" type="checkbox"/> OUTDOOR

24V DIMMING DRIVERS

	SKU	VOLTAGE	WATTAGE	OUTPUT	DIMENSIONS	WIRING:
	LS-60D-24CV	120V AC	60W MAX Class 2	24V DC	L4.37 X W1.81 X H0.79 in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> INDOOR <input type="checkbox"/> PLUG <input type="checkbox"/> OUTDOOR
	LS-24V-96W-Dim-CVE	120V AC	96W MAX Class 2	24V DC	L15 X W3 X H2.25 in.	<input checked="" type="checkbox"/> HARDWIRE <input checked="" type="checkbox"/> INDOOR <input type="checkbox"/> PLUG <input checked="" type="checkbox"/> OUTDOOR