


12V AC - DC Converter

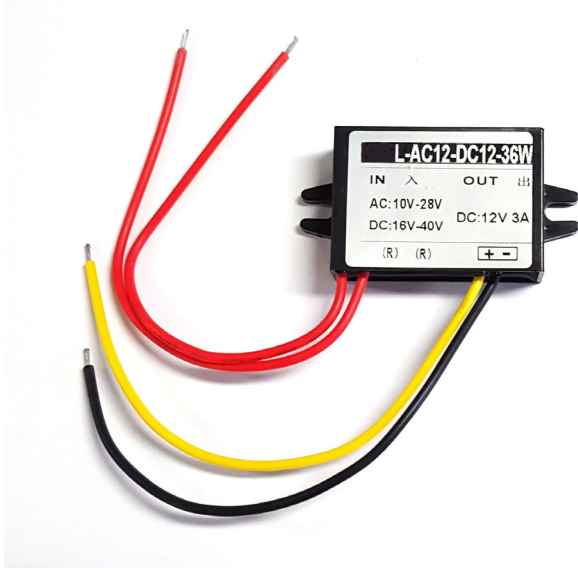


| | |
|----------------|--|
| Product Code | LS-CONV-12AC-12DC-36W |
| Input Voltage | 10-28V AC or 15-40V DC |
| Output Voltage | 12V DC, 3 AMPS |
| Wattage | 36W Max Load |
| Dimensions | L2 ^{1/2} " x W1 ^{1/4} " x H3/4" L63.5 x W32 x H19mm |
| Wire Leads | 5" (127mm) Length |
| IP Rating | 65 |

Notes: 12V AC-DC Buck Converter

Applications: Switching 12V AC, common for outdoor lighting to a 12V DC Output

24V DC - 12DC Converter

| | |
|----------------|--|
| Product SKU | LS-CONV-24DC-12DC-36W |
| Input Voltage | 15-40V DC |
| Output Voltage | 12V DC, 3 AMPS |
| Wattage | 36W Max Load |
| Dimensions | L2 ^{1/2} " x W1 ^{1/4} " x H3/4" L63.5 x W32 x H19mm |
| Wire Leads | 5" (127mm) Length |
| IP Rating | 65 |

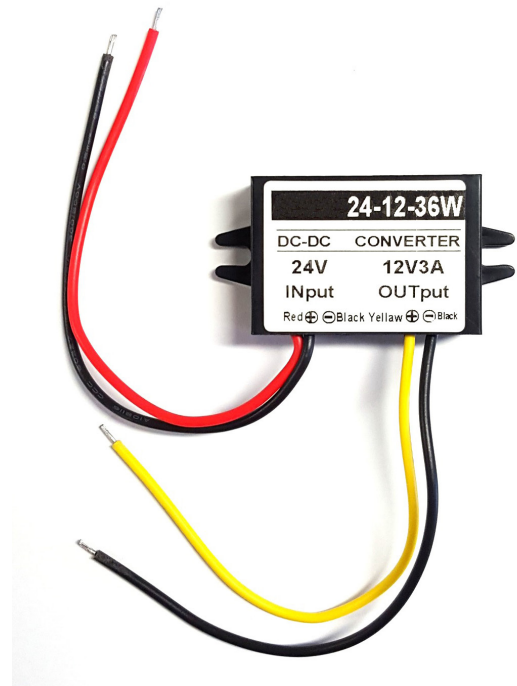

Notes: 12V AC-DC Buck Converter

Applications: Switching 24V or 32V DC Batteries common on Yachts and Off Grid homes to a 12V DC Output