




4"

6"

Super thin profile  
1" Clearance



Product Code	LS-8.5W-RD-3K / LS-8.5W-RD-4K LS-14W-RD-3K / LS-14W-RD-4K
Voltage	12V DC (Constant Voltage)
Wattage	4" - 8.5W 6" - 14W
Install	Recessed
Housing	Aluminum
Degree	120°
Color Temperature	3000K Warm white 4000K Natural white
Lumen output	8.5W (410) 14W (755)
Dimmable	Yes

**IC Rated** - Certified for direct contact with insulation

### Applications



Recessed lighting  
Office lighting  
Kitchen lighting  
Hallway lighting

### Features


- Install directly into drywall
- Ideal for replacing recessed pot lights
- Low power consumption: 8.5W - 14W
- High brightness **LED** technology
- Thin IC rated - Easy to install with spring clips
- Excellent color temperature

### 3 Year Warranty

4 inch LED panel light

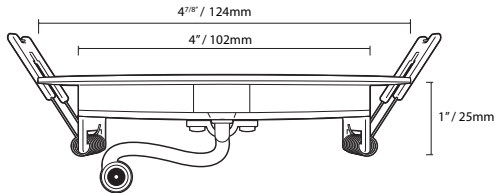

6 inch LED panel light

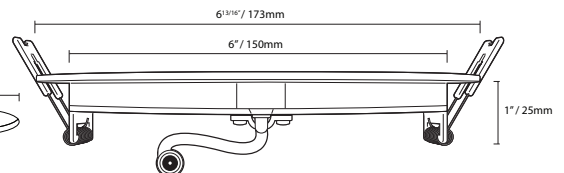

Pressure fit clips allow for quick installation

Product SKU	Outer dimensions	Recessed Hole Size
<b>LS-8.5W-RD-XX</b>	W4 <sup>7/8</sup> " x H1" W124x H25mm	4 <sup>1/4</sup> " / 108mm (Cutout)
<b>LS-14W-RD-XX</b>	W6 <sup>13/16</sup> " x H 1" W173 x H25mm	6 <sup>1/4</sup> " / 159mm (Cutout)

**Dimmable:** Must be used with our **LED Dimmable** power supply.  
(Sold separately - Stocked in 20W / 60W/ 150W & 300W) p. 54