

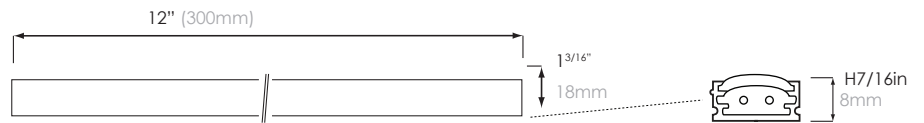


**Plug & Play** 24V system  
Even illumination - No Hot Spots



Product Code	LS-LL50-6-3K LS-LL50-6-4K	LS-LL50-12-3K LS-LL50-12-4K	LS-LL50-40-3K LS-LL50-40-4K
Voltage	24V DC	24V DC	24V DC
Wattage	3W	5W	15W
Max Run	6M (20')	6M (20')	6M (20')
Color Temp	3000K / 4000K	3000K / 4000K	3000K / 4000K
Dimensions	Length: 6" W1 <sup>3</sup> / <sub>16</sub> " x H7/16" Length: 150mm W18 x H8mm	Length: 12" W1 <sup>3</sup> / <sub>16</sub> " x H7/16" Length: 300mm W18 x H8mm	Length: 40" W1 <sup>3</sup> / <sub>16</sub> " x H7/16" Length: 1000mm W18 x H8mm
Lumen output	225	410	1100
CRI	92	92	92
Dimmable	Yes	Yes	Yes
Includes	2 x Slim surface mount clips		

### Dimensions:










## Applications

Under cabinet light  
Back bar displays  
Display lighting  
Furniture

## Features

- Bright, even illumination - No hot spots
- Simple installation - Multiple ways to mount
- Easily connect together for larger applications
- Sleek profile -- Aluminum housing
- Energy efficient - lifespan **+50,000 hours**

### 3 Year Warranty

Accessories	Description	Code
Input power 	24V DC input with barrel connector, 18" long	LS-LL50-IP
Touch Switch 	Touch switch with barrel connector for input, 18"	LS-LL50-TS
Middle connector 	Middle connector for linking lights together	LS-LL50-MC
Corner Connector 	Corner connector for 90° corners	LS-LL50-CC
Jump connector 	Corner connector with 18" wire lead in middle	LS-LL50-JC
45° Angle clip 	Angled clip for 45° installation	LS-LL50-AC
3M Tape 	3M Tape for simple installation	LS-LL50-3M

Power Supply options for LL50	
24V LED Power supply **Class 2	SKU
Non-Dimmable	
**60W	LS-24V-60W-Driver
120W	LS-24V-120W-Driver
240W	LS-24V-240W-Driver
Dimmable	
**60W (Universal)	LS-24V-60D-CV
**96W (Electronic)	LS-24V-96W-CVE

[lumenstarled.com](http://lumenstarled.com)