





These Low Profile LED Ceiling lights each include their own dimmable LED power supply. Little clearance needed and does not require a Can to fit into, IC rated for direct to insulation, airtight. Just cut your hole, feed 120V, make connection to included box, snap light into hole with springs. Includes the LED Light source, a trim and in ceiling power supply, and no Can is required. **CSA. 3 Year Warranty.**

### Thin recessed Panel Lights (IC Rated, damp location, air tight)

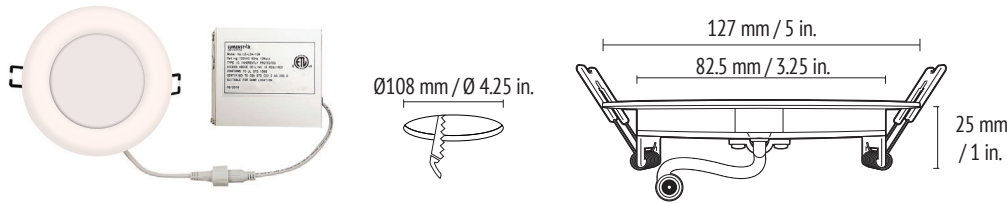

#### 4 inch Panel Light


Code: LS-LD4-10W-3K (Warm White)  
Code: LS-LD4-10W-5K (White)  
Voltage: 120V, 10W  
660 Lumens, CRI >85  
3000K, 5000K  
White trim finish

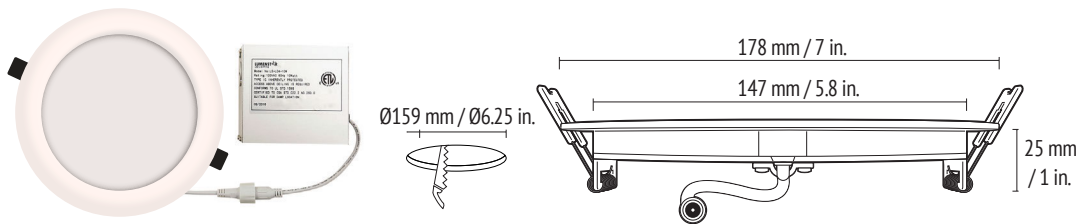

#### 6 inch Panel Light



Code: LS-LD6-15W-3K (Warm White)  
Code: LS-LD6-15W-5K (White)  
Voltage: 120V, 15W  
1060 Lumens, CRI >85  
3000K, 5000K  
White trim finish

### LED Gimbal downlight (IC Rated, damp location)

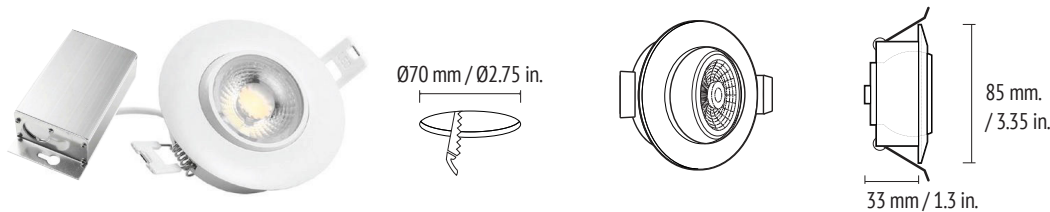

#### 3 inch Gimbal Light

Code: LS-3GDL-3K  
Voltage: 120V AC, 8W  
IC Rated, Dimmable, 40°  
775 Lumens, CRI >85  
Warm White 3000K  
White trim finish

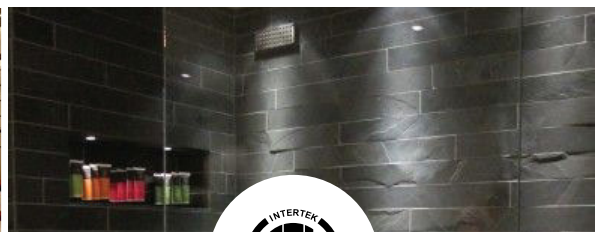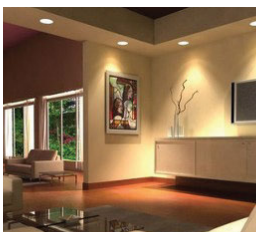

[lumenstarled.com](http://lumenstarled.com)