

## MADDOX LED PATH LIGHT



This modern path light provides an excellent light output for path and ground lighting. It casts 2700K warm white LED light for easy integration into landscape lighting designs.

### Features

- Modern design
- Directly wire to 12V AC or DC
- Stainless Steel powder coated Matte Black

### Includes

Inground stake

### Applications

Path | Architectural | Landscape | Accent

### Installation

Easy install with inground stake



### Specifications



|              |   |
|--------------|---|
| Voltage      | 12V AC/DC                                 |
| Wattage      | 3W  |
| Lumens       | 320                                       |
| Color Temp   | 2700K                                     |
| CRI          | >90                                       |
| Lifespan     | +50,000 hours                             |
| Beam Degree  | 120°                                      |
| Working Temp | -20~+45°C (-4~113°F)                      |
| IP           | 65  |
| Dimmable     | No  |
| Housing      | Stainless Steel powder coated Matte Black |
| Wire Length  | 40" (100cm)                               |
| Warranty     | 3-years                                   |

### Finishes Available



Black

### Dimensions

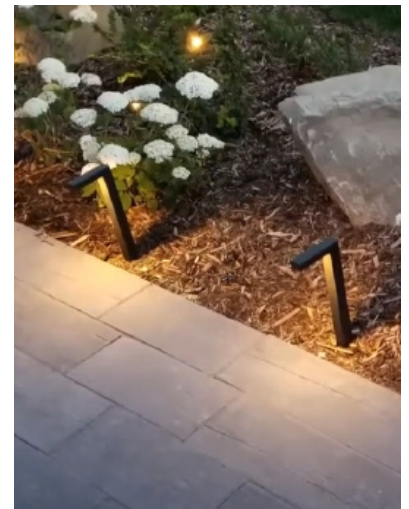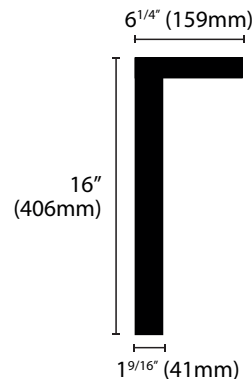



## Ordering Codes

|      | Product | Voltage          | Wattage             | Color Temp         |
|------|---------|------------------|---------------------|--------------------|
| LS - | LL30    | 12               | 3W                  | 27K                |
|      |         | <b>12</b> : 12 V | <b>3W</b> : 3 watts | <b>27K</b> : 2700K |

## Power Supplies

| Image   | Code              | Voltage | Output Power | Class II | Dimmable Specs   |
|---|-------------------|---------|--------------|----------|--|
| <b>Non-Dimmable</b>   |                   |         |              |          |  |
|    | LS-12V-30W-O-CV   | 12V DC  | Max. 30W     | √        | N/A  |
|    | LS-12V-60W-O-CV   | 12V DC  | Max. 60W     | √        | N/A  |
|    | LS-12V-96W-O-CV   | 12V DC  | Max. 96W     | x        | N/A  |
|    | LS-12AC-200W-LPS  | 12V AC  | Max. 200W    | x        | Non dim outdoor transformer with built in photocell and timer    |
| <b>Dimmable</b>   |                   |         |              |          |  |
|  | LS-12V-30D-MLT-CV | 12V DC  | Max. 30W     | √        | Triac/Phase. 0-10V, 1-10V, Potentiometer, 10V PWM 5 in 1 dimming |
|  | LS-12V-60D-MLT-CV | 12V DC  | Max. 60W     | √        | Triac/Phase. 0-10V, 1-10V, Potentiometer, 10V PWM 5 in 1 dimming |

## Accessories

| Image   | Product                | Code           | Description   |
|---|------------------------|----------------|---|
|  | 100' Outdoor Wire      | LS-OW-16-2-100 | Outdoor wire for led lights. 16-2 AWG   |
|  | Outdoor Rated Marettes | LS-GEL-MAR     | Outdoor rated, gel filled marettes ensure secure electrical connections in outdoor and wet conditions. Pack of 2. |