

## ILLUMIPULSE LED SIGN MODULE - 2 MOD



For outdoor use, available in 12V DC with warm white or cool white color temperature options. Use LED sign modules with our low voltage power supplies for maximum impact. **25 mods per pack.**

### Features

- Outdoor rated
- 2835 LEDs
- 12.5' length includes 25 mods with 4.5" (11cm) wire length between mods
- Durable and long lasting
- Thermal Resistant PC housing

### Applications

Back-lighting Signage | Back-lighting Other  
Transparent Objects | Perimeter lighting

### Installation


Simple installation using 3M tape on back or with screw tabs



### Specifications

Voltage	12V DC
Wattage	0.66W per mod
Lumen Output	55 per mod
Color Temp	3000K / 4000K / 5000K / 6000K
# of LEDs	2 per mod
Length	12.5' (3.8M)
Lifespan	+50,000 hours
Working Temp	-30~+60°C (-13~140°F)
IP Rating	65
Wire Length	12.5' length with 4.5" (11cm) wire length between mods
Warranty	5 Years



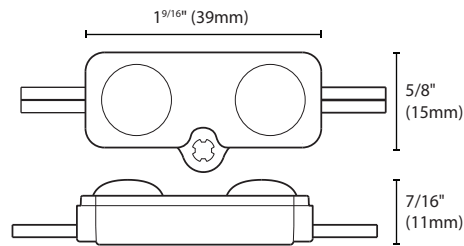


### Dimensions






### Ordering Codes

Product	# of LEDs	Color Temp
Sign Module LS - LM	2 : 2 LEDs	3K : 3000K    4K : 4000K 5K : 5000K    6K : 6000K

## Power Supplies

Image	Code	Voltage	Output Power	Class II	Dimmable Specs
<b>Non-Dimmable</b>					
	LS-12V-30W-O-CV	12V	Max. 30W	✓	N/A
	LS-12V-60W-O-CV	12V	Max. 60W	✓	N/A
	LS-12V-96W-O-CV	12V	Max. 96W	x	N/A
	LS-12V-150W-O-CV	12V	Max. 150W	x	N/A
	LS-12V-60W-JB-O-CV	12V	Max. 60W	✓	N/A

## Controls

Image	Product	Code	Description	Functions	Dimensions
	Rotary Dimmer - High Amperage	LS-DIM-30A-R	Inline low voltage dimmer with remote. Remote turns on/off and dims brightness up/down - dims puck lights, linear lights, flexible strip lights, and more.	12V or 24V DC 1x30A/Channel 12V: 360W, 24V: 720W On/off & rotary dim	L3 <sup>3</sup> / <sub>8</sub> x W2 <sup>7</sup> / <sub>16</sub> x H13 <sup>1</sup> / <sub>16</sub> " (L85 x W62 x H20mm)
	Single Color Handheld Remote	LS-SC-MZR	Controls Single Color Lights, 868Mhz	Multi-zone (4), 3 Presets, Dimming	L4 <sup>3</sup> / <sub>4</sub> x W2 <sup>3</sup> / <sub>16</sub> x H1 <sup>1</sup> / <sub>16</sub> " (L120 x W55 x H17mm)
	Outdoor MZ LED Receiver	LS-RCV-O-MZ5A	Receiver for RF Remotes (RGB/RGBW). Wifi Capable. Outdoor rated for harsh environments	12-36V DC 4 x 5A/Channel 4x(60-180W) Output Power 15M (50') Remote Range	L7 <sup>1</sup> / <sub>8</sub> x W21 <sup>5</sup> / <sub>16</sub> x H1 <sup>1</sup> / <sub>2</sub> " (L180.5 x W74x H38mm)