




JOB#

Product Code: LS-LM-2-3K (3000K Warm White) | LS-LM-2-6K (6000K Cool White)

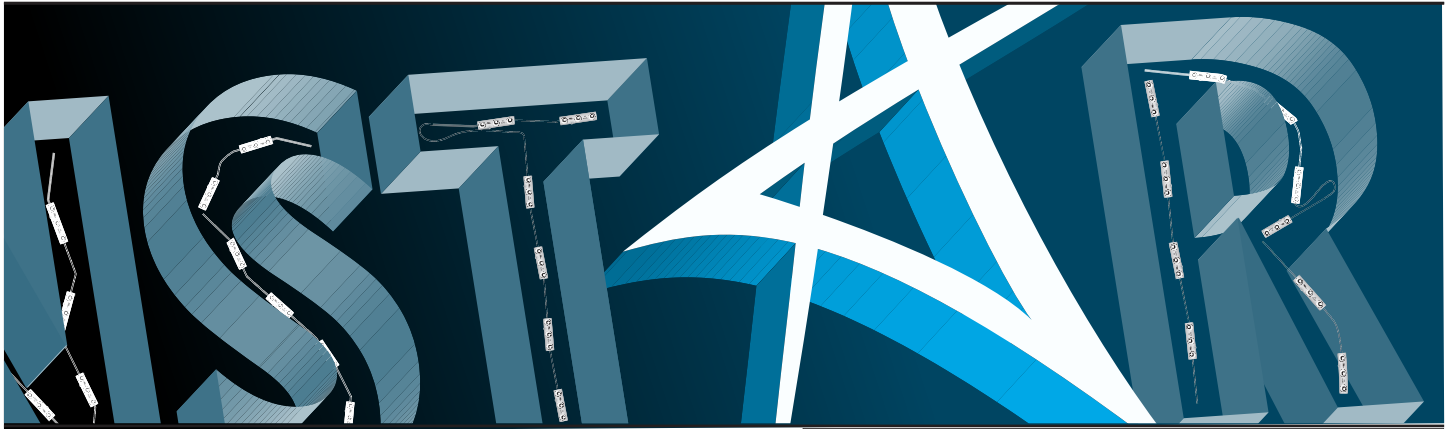

2 LEDs, 0.66W per module. L1^{9/16} x W3/4 x H7/16" (L39 x W15 x H11mm)
12.5' length includes 25 modules with 3" wire length between modules

VOLTAGE: 12V DC	CALCULATIONS WATTS: 0.66 (x) QTY: = TOTAL WATTAGE:
WATTAGE: 0.66W	
SPREAD: 140°	
LUMENS: 55	

Product Code: LS-LM-3-6K (6000K Cool White)



3 LEDs, 1.02W per module. L2^{3/8} x W3/4 x H7/16" (L61 x W19 x H11mm)
12.5' length includes 25 modules with 3" wire length between modules

VOLTAGE: 12V DC	CALCULATIONS WATTS: 1.02 (x) QTY: = TOTAL WATTAGE:
WATTAGE: 1W	
SPREAD: 140°	
LUMENS: 75	

Product Code: LS-LM-RGB (Color changing. Requires RGB controller)



3 LEDs, 0.75W per module. L3^{1/8} x W1/2 x H5/16" (L80 x W12 x H7mm)
12.5' length includes 25 modules with 3" wire length between modules

VOLTAGE: 12V DC	CALCULATIONS WATTS: 0.75 (x) QTY: = TOTAL WATTAGE:
WATTAGE: 0.75W	
SPREAD: 140°	
LUMENS: 75	



- Durable & Long Lasting +65,000 hours
- Simple installation using 3M tape on back or with screw tabs
- Integrated lens for better light dispersement
- Outdoor rated IP66
- 5 Year Warranty

DRIVERS	CODE	VOLTAGE	WATTAGE	OUTPUT	DIMENSIONS	CHOOSE WIRING
30W In/Outdoor LED Power Supply	LS-12V-30W-O-CV	120V AC (50/60Hz)	30W MAX Class 2	12V DC 2.5A	L6 ^{1/4} x W2 ^{5/16} x H3/4 in.	☒ HARDWIRE ☒ PLUG
60W In/Outdoor LED Power Supply	LS-12V-60W-O-CV	120V AC (50-60Hz)	60W MAX Class 2	12V DC 5A	L7 ^{7/16} x W1 ^{7/8} x H1 ^{5/16} in.	☒ HARDWIRE ☒ PLUG
96W In/Outdoor LED Power Supply	LS-12V-96W-O-CV	120V AC (50-60Hz)	96W MAX	12V DC 8A	L7 ^{5/16} x W2 ^{11/16} x H1 ^{3/4} in.	☒ HARDWIRE ☒ PLUG
150W In/Outdoor LED Power Supply	LS-12V-150W-O-CV	120V AC (50/60Hz)	150W MAX	12V DC 12A	L9 ^{7/16} x W2 ^{13/16} x H1 ^{3/4} in.	☒ HARDWIRE ☒ PLUG
264W In/Outdoor LED Power Supply	LS-12V-264W-O-CV	120V AC (50/60Hz)	264W MAX	12V DC 22A	L8 ^{15/16} x W3 ^{5/8} x H1 ^{7/8} in.	☒ HARDWIRE ☒ PLUG