

Date:

Project:

Notes:

120V CCT THIN RECESSED LED PANELS

For low clearance applications, available in 120V AC and includes a dimmable hardwire LED power supply.

Features

- Super thin profile, 1" clearance
- Includes dimmable LED power supply (hardwire)
- ETL Listed (CSA & UL)

Applications

Recessed | Office | Kitchen | Hallway

Installation


Recessed install with spring clips, directly into dry wall

- **10W, 4"** : 4^{1/4"} (108mm) / **15W, 6"** : 6^{1/4"} (159mm)




Diameter	4" (102mm)	6" (152mm)
Voltage	120V AC	
Wattage	9W	14W
Color Temp	Can choose CCT on site from 3000K, 4000K or 5000K	
CRI	>85	
Lumens	600	1000
Beam Degree	120°	
Dimmable	Included dimmable LED power supply (hardwire)	
Housing	Aluminum	
Lifespan	+60,000 hours	
Warranty	3-year	

Finishes Available



Dimensions

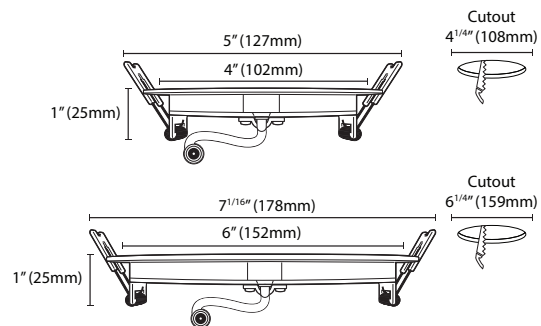

Ordering Codes

Product Color Temp

LS - -

LD4-9W : 4" Panel **CCT** : 3000K, 4000K, 5000K

LD6-14W : 6" Panel