

3" LUNA GIMBAL LED DOWNLIGHT



Super bright, sleek downlight for low clearance applications includes dimmable driver in hardwire junction box. IC rated.

Features

- 360° rotation and 45° tilt
- Little clearance needed
- Airtight install directly into dry wall
- Includes dimmable, hardwire LED power supply
- Choose the light color on site with CCT selectable button (2700K / 3000K / 3500K / 4000K / 5000K)

Applications

Recessed | Office | Kitchen | Hallway

Installation

Recessed install, 2^{3/4}" (70mm) cutout, directly into drywall



Specifications


Voltage	120V AC
Wattage	8W
Color Temp	5CCT Selectable - 2700K / 3000K / 3500K / 4000K / 5000K
CRI	>85
Lumen Output	775
Beam Angle	45°
Lifespan	+60,000 hours
Trim Diameter	Ø3 ^{3/8} " (85mm)
Cutout Size	Ø2-3/4" (70mm) or 3" (76mm)
Warranty	3 Years

Finishes Available




White

Dimensions

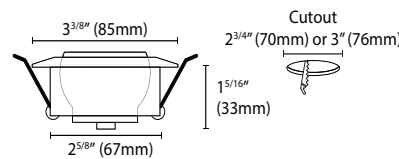

Driver / Junction Box

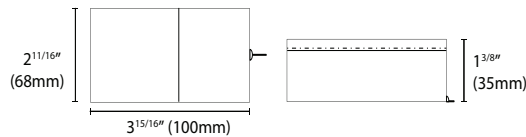

Ordering Codes

Product: Color Temp:

LS - -

5CCT : 5CCT Selectable - 2700K / 3000K / 3500K / 4000K / 5000K