

COMMERCIAL GRADE OUTDOOR BISTRO STRING LIGHTS



Commercial Grade Outdoor Bistro String Lights are designed for decorative and ambient lighting in outdoor commercial environments. Rated for wet locations, the suspended configuration supports longer spans and flexible layouts for hospitality and event installations.

Key Features

- Suitable for indoor and outdoor wet-location use
- Suspended socket design for overhead installations
- Durable PVC sockets with weather-resistant bulb seals
- Designed for commercial applications
- Available in 50 ft and 100 ft lengths
- Multiple lengths can be connected in series
- Aircraft cable available for added stability on long spans
- Maximum 20 ft spacing between supports without aircraft cable
- Suspended configuration
- Custom lengths available

Applications

Restaurant patios | Outdoor dining areas | Event and festival spaces | Hospitality and entertainment venues



Specifications

Base	E26 medium base	
Length	15M (50')	30M (100')
Wattage	Max. 600W	Max. 1200W
Voltage	120V AC	
# of Sockets	24	48
IP Rating	65	
Lead Wire Length	48" with plug / 24" socket spacing	
Wire Gauge	14/2	
Housing	PVC	
Warranty	3-years	

Housing



Black

NEW BISTRO SHADE


Dark Skies Compliant
LS-BS-BK



Custom String Light options available - MOQ may be required

SUSPENDED SOCKETS MEDIUM E26 BASE

Dimensions

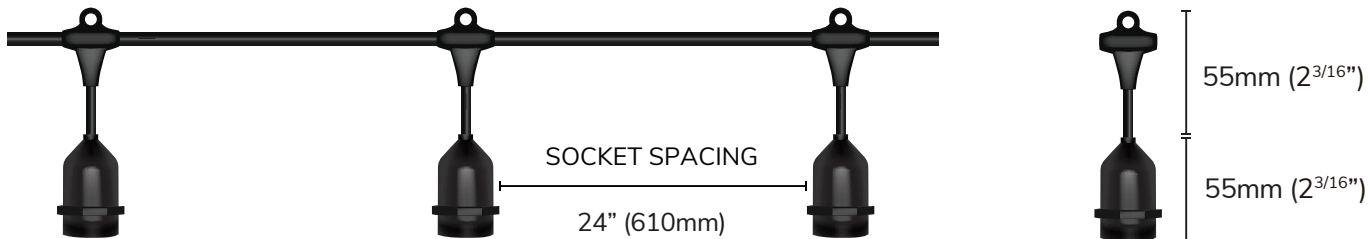

Ordering Codes


	Product	# of Sockets	Length
50FT Suspended String Light	LS - <input type="text" value="S"/> - S : Suspended	<input type="text" value="24"/> - 24 : 24 sockets	<input type="text" value="50'"/> - 50' : 50FT

100FT Suspended String Light	LS - <input type="text" value="S"/> - S : Suspended	<input type="text" value="48"/> - 48 : 48 sockets	<input type="text" value="100'"/> - 100' : 100FT
-------------------------------------	--	--	---

Custom Suspended String Light MOQ may be required	LS - <input type="text" value="S"/> - S : Suspended	<input type="text" value="XX"/> - XX : based on spacing	<input type="text" value="XXX"/> - XXX : Length in feet	<input type="text" value="E26"/> - E26 : Medium Base	<input type="text" value="BK"/> - BK : Black	<input type="text" value="GR"/> - GR : Green
				<input type="text" value="E12"/> - E12 : Candelabra	<input type="text" value="WT"/> - WT : White	<input type="text" value="BR"/> - BR : Brown
				<input type="text" value="E17"/> - E17 : Intermediate		

NON-SUSPENDED SOCKETS MEDIUM E26 BASE

Dimensions

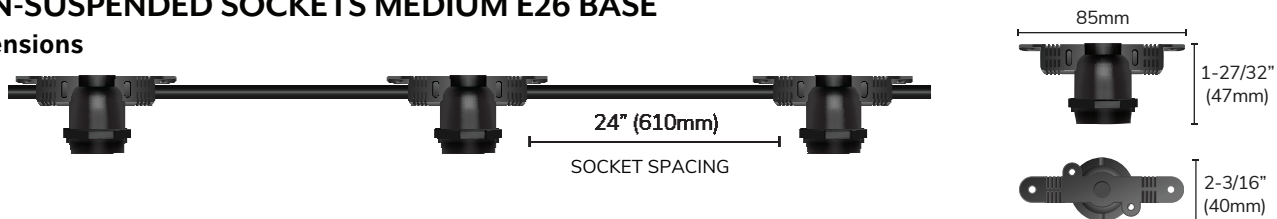

Ordering Codes

	Product	# of Sockets	Length
50FT Non-Suspended String Light	LS - <input type="text" value="NS"/> - NS : Non-Suspended	<input type="text" value="24"/> - 24 : 24 sockets	<input type="text" value="50'"/> - 50' : 50FT

100FT Non-Suspended String Light	LS - <input type="text" value="NS"/> - NS : Non-Suspended	<input type="text" value="48"/> - 48 : 48 sockets	<input type="text" value="100'"/> - 100' : 100FT
---	--	--	---

Custom Non-Suspended String Light MOQ may be required	LS - <input type="text" value="NS"/> - NS : Non-Suspended	<input type="text" value="XX"/> - XX : Decide based on spacing	<input type="text" value="XXX"/> - XXX : Length in feet	<input type="text" value="E26"/> - E26 : Medium Base	<input type="text" value="BK"/> - BK : Black	<input type="text" value="GR"/> - GR : Green
				<input type="text" value="E12"/> - E12 : Candelabra	<input type="text" value="WT"/> - WT : White	<input type="text" value="BR"/> - BR : Brown
				<input type="text" value="E17"/> - E17 : Intermediate		

Accessories

Product	Code	Product	Description
	LS-BS-BK	Bistro Shade	Dark Skies Compliant: Designed to minimize light pollution by directing illumination downward, reducing glare and skyglow. 7.5" diameter
	LS-ACC-*FT * = Custom Length	1/8" Stainless Aircraft Cable	Ordered by the foot
	LS-ACLS	1/8" Crimping Loop Sleeve	Durable 1/8" crimping loop sleeve for securing wire rope loops

Decorative Bulbs

Image	Code	Product	Description
	LS-E26-S11-CLR	Clear S11	Clear Glass, E26 Base, 120V AC, 1W
	LS-E26-S11-FST	Frosted S11	Dimmable Frosted Glass, E26 Base, 120V AC, 1W
	LS-E26-S11-PC-FIL	Dim Fil 2" S11	Dimmable 2" Clear Plastic Globe, E26 Base, 120V AC, 1W
	LS-E26-S14-CLR	Clear S14	Clear Glass, E26 Base, 120V AC, 1.4W
	LS-E26-S14-FST	Frosted S14	Dimmable Frosted Glass, E26 Base, 120V AC, 1.4W
	LS-E26-S14-FIL	S14 Filament	Dimmable Filament, E26 Base, 120V AC, 1.4W