

NANO LED DECK & STEP LIGHT



Ultra small, but super bright recessed LED light offers excellent warm white color quality.

Features


- Super bright ultra small recessed light
- Pressure fit clips good for thin walled structures
- Low profile trim
- High efficiency COB LED

Applications

Deck | Step | Landscape | Dock | Railings

Installation


Recess mounting, Ø5/8" (16mm) cutout

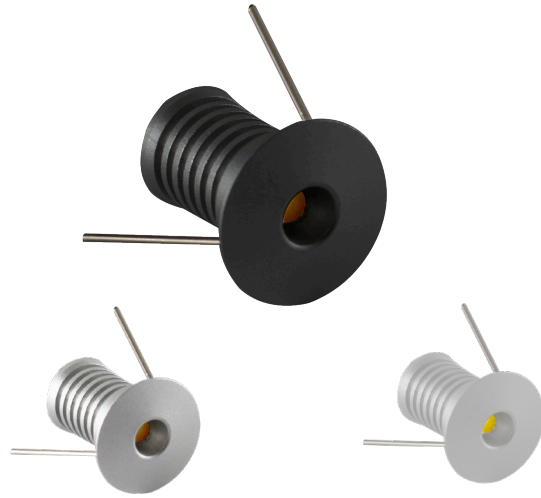


Specifications

Voltage	12V DC
Trim Diameter	Ø3/4" (19mm)
Wattage	0.5W
Lumen Output	68
Color Temp	3000K
# of LEDs	1 COB LED
CRI	>85
Lifespan	+50,000 hours
Beam Angle	60°
Working Temp	-20~+45°C (-4~113°F)
IP	65
Wire Length	35" (90cm)
Warranty	3 Years

Finishes Available



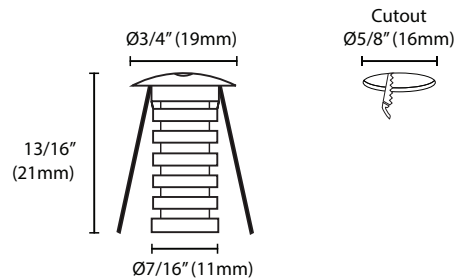

Dimensions









Ordering Codes

Product	Wattage	Color Temp
LS - RD21 - - 3K		
	BC : Brushed Chrome	3K : 3000K
	BK : Black	
	WT : White	

More Accessories

Image	Product	Code	Description
	100' Outdoor Wire	LS-OW-16-2-100	Outdoor wire for led lights. 16-2 AWG
	Outdoor Rated Marettes	LS-GEL-MAR	Outdoor rated, gel filled marettes ensure secure electrical connections in outdoor and wet conditions. Pack of 2.

Power Supplies

Image	Code	Voltage	Output Power	Class II	Dimmable Specs
Non-Dimmable					
	LS-12V-15W-CV	12V	Max. 15W	√	N/A
	LS-12V-30W-CV	12V	Max. 30W	√	N/A
	LS-12V-30W-O-CV	12V	Max. 30W	√	N/A
	LS-12V-60W-O-CV	12V	Max. 60W	√	N/A
Dimmable					
	LS-12V-24D-CV	12V	Max. 24W	√	Triac Dimming
	LS-12V-48D-CV		Max. 48W	√	
	LS-12V-60D-CV		Max. 60W	√	
	LS-12V-30D-MLT-CV	12V	Max. 30W	√	Triac/Phase. 0-10V, 1-10V, Potentiometer, 10V PWM 5 in 1 dimming
	LS-12V-60D-MLT-CV	12V	Max. 60W	√	Triac/Phase. 0-10V, 1-10V, Potentiometer, 10V PWM 5 in 1 dimming