

High Output 5050 LED Flex



Side view of weather protection



Roll Length: 5M (16.4')

Cut distance: 12V ::: 3 LEDs - 62mm (2^{7/16}")

Product Code	5M(16.4'):	LS-FLI-2B-24-120-3K LS-FLI-2B-24-120-55K Moisture proof version: LS-FLM-2B-24-120-3K LS-FLM-2B-24-120-55K
Voltage		12V DC
Wattage		11.5W/M (3.5W/FT)
# of LEDs		48 - 5050 Chips/M
Color Temperature		3000K Warm White 5500K Cool White
Lumen Output		1180/M (360/FT)
Beam Degree		140°
CRI		>90
Dimensions		W25/64 x H1/16" (W10 x H1.5mm) W25/64 x H1/8" (W10 x H3mm)
Dimmable		Yes



Applications

Cove lighting
Display lighting
Deck lighting
Back bar lighting

Features

- Ultra thin flexible LED strip
- Double sided 3M tape
- Silicone coating for moisture proof version
- Xbrite SMD LED technology
- Modern contemporary design
- Simple to install
- +50,000 hour lifespan

3 Year Warranty

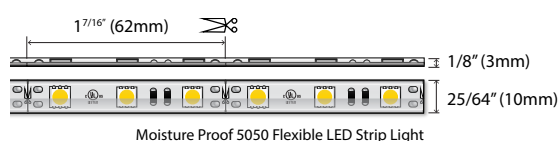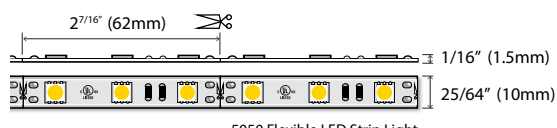

Solderless Connectors

Product Code	Product
LS-SC1-5050	Seamless connector - Application: Add length
LS-SC2-5050	Connector on one end - Application: Cut strip to power
LS-SC3-5050	Connector on both ends - Application: Corners
LS-SC4-5050	L-Connector - Application: Corners