String Lights: Suspended & Non-suspended

Suspended (4ft. beginning lead with plug, 2ft. socket spacing)

50 ft. Suspended
LS-S-24-50'
120V AC, MAX 600W
24 x E26 medium base sockets
50' lengths can be plugged together

100 ft. Suspended
LS-S-48-100'
120V AC
48 x E26 medium base sockets
Max Wattage: 1200W

Non-Suspended (4ft. beginning lead with plug, 2ft. socket spacing)

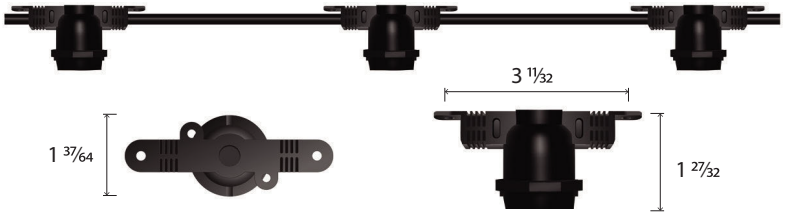

50 ft. Non-Suspended
LS-NS-24-50'
120V AC, MAX 600W
24 x E26 medium base sockets
50' lengths can be plugged together

100 ft. Non-Suspended
LS-NS-48-100'
120V AC
48 x E26 medium base sockets
Max Wattage: 1200W

E26 Medium Base Decorative LED Bulbs

S14 - Frost
LS-E26-S14-FST
120V AC, 1.4W, E26 medium
Ø45 x H63mm
Ø1.75 x H3.50 in.

S14 - Clear
LS-E26-S14-CLR
120V AC, 1.4W, E26 medium
Ø45 x H63mm
Ø1.75 x H3.50 in.

S14 - Dimmable Filament
LS-E26-S14-FIL
120V AC, 2W, E26 medium
Ø45 x H63mm
Ø1.75 x H3.50 in.

S11 - Frost
LS-E26-S11-CLR-XX
120V AC, 1W, E26 medium
Ø40 x H61mm
Ø1.57 x H2.40 in.

S11 - Clear
LS-E26-S11-CLR-XX
120V AC, 1W, E26 medium
Ø40 x H61mm
Ø1.57 x H2.40 in.

Aircraft Cable
Order by the foot

lumenstarled.com

Address: #108 - 1500 Hartley Ave
Coquitlam B.C. V3K 7A1
Local: 604.484.9394
Toll Free: 1.866.852.7857
© 2018 All rights reserved
Lumenstar LED Lighting Inc.