

Date:

Project:

Notes:

120V THIN RECESSED LED PANELS

For low clearance applications, available in 120V AC and includes a dimmable hardwire LED power supply.

Features

- Super thin profile, 1" clearance
- Includes dimmable LED power supply (hardwire)
- ETL Listed (CSA & UL)

Applications

Recessed | Office | Kitchen | Hallway

Installation


Recessed install with spring clips, directly into dry wall

- **10W, 4"** : 4^{1/4"} (108mm) / **15W, 6"** : 6^{1/4"} (159mm)




Diameter	4" (102mm)	6" (152mm)
Voltage	120V AC	
Wattage	10W	15W
Color Temp	3000K / 5000K	
CRI	>85	
Lumens	660	1060
Beam Degree	120°	
Dimmable	Included dimmable LED power supply (hardwire)	
Housing	Aluminum	
Lifespan	+60,000 hours	
Warranty	3-year	

Finishes Available



Dimensions

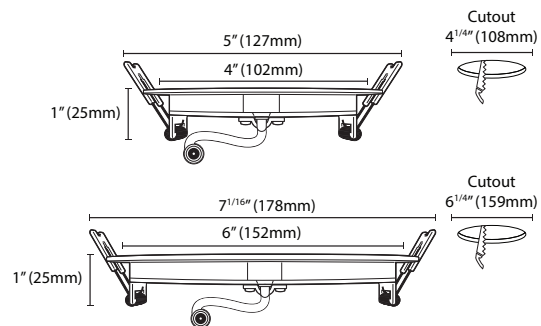

Ordering Codes

	Product	Color Temp
120V Panel Light	LS - <input type="text"/>	- <input type="text"/>
	LD4-10W : 4" Panel	3K : 3000K
	LD6-15W : 6" Panel	5K : 5000K