





JOB#

These low profile LED ceiling lights each include their own dimmable LED power supply. Little clearance is needed and does not require a Can to fit into, IC rated for direct to insulation, airtight. Just cut your hole, feed 120V make connection to included box, snap light into hole with springs. Includes the LED light source, a trim and in ceiling power supply. **CSA. 3 Year Warranty.**

4 inch Thin Recessed Panel Light (IC Rated, Damp Location, Air tight)

Product Code: LS-LD4-10W-3K (3000K Warm White) | LS-LD4-10W-5K (5000K White)

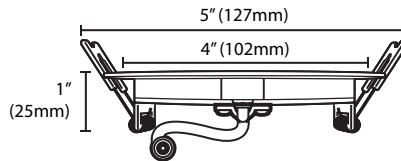



VOLTAGE: 120V
WATTAGE: 10W
CRI: >85
LUMENS: 660

CALCULATIONS	
WATTS: 10	X QTY:
=	TOTAL WATTAGE:

6 inch Thin Recessed Panel Light (IC Rated, Damp Location, Air tight)

Product Code: LS-LD6-15W-3K (3000K Warm White) | LS-LD6-15W-5K (5000K White)

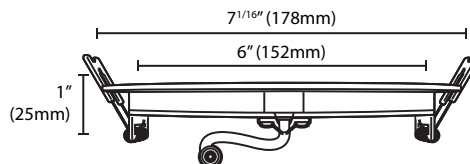



VOLTAGE: 120V
WATTAGE: 15W
CRI: >85
LUMENS: 1060

CALCULATIONS	
WATTS: 15	X QTY:
=	TOTAL WATTAGE:

LED Gimbal Downlight (IC Rated, Damp Location)

Product Code: LS-3GDL-3K (3000K Warm White)

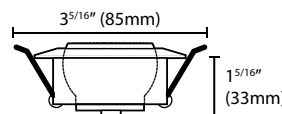

VOLTAGE: 120V
WATTAGE: 8W
CRI: >85
LUMENS: 775

CALCULATIONS	
WATTS: 8	X QTY:
=	TOTAL WATTAGE: