

HENDRIX LED PATH LIGHT



Lumenstar's newest modern path light offers various customizable components.

Features

- Directly wire to 12V AC/DC
- Powder coated matte black finish
- Quick connection system available

Applications

Walkways | Path | Step | Garden

Installation

Inground stake

Includes


Top cap, light engine stem, LED and stake




Specifications

Voltage	12V AC/DC	
Wattage	2W (G4 Bulb)	4W (G4 Bulb)
Color Temp	2700K / 3000K / 6000K	2700K / 3000K
Lumens	220	445
# of LEDs	1 COB LED	2835 chips
CRI	>90	
Lifespan	+50,000 hours	
Beam Angle	120°	
Working Temp	-20~+45°C (-4~113°F)	
IP	65	
Dimmable	No	
Housing	powder coated Matte Black	
Wire Length	40" (100cm)	
Warranty	3-year	

Finishes Available



Dimensions

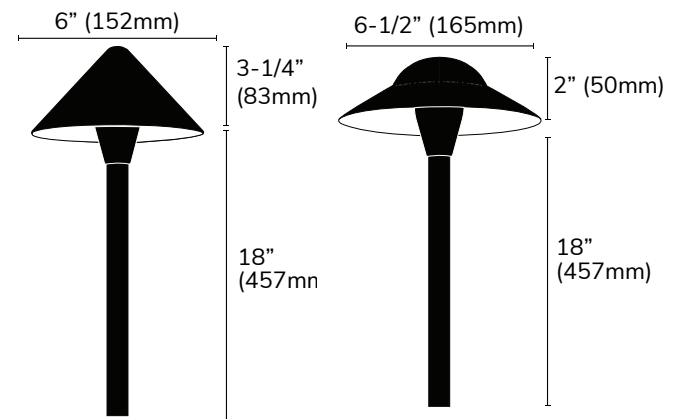



ORDERING CODES



G4 LED bulbs, Path Light Stem and Caps require separate ordering codes.

G4 LED Bulb



Choose a G4 bulb color temperature.

Image	Code	Product	Description
	LS-G4-2W-COB-27K	2W G4 LED Bulb	12V AC/DC, 2W, G4 bi-pin base. L1 ^{1/8} x W3/8" (L28 x W10mm)
	LS-G4-2W-COB-3K		
	LS-G4-2W-COB-6K		
	LS-G4-4W-SMD-27K	4W G4 LED Bulb	12V AC/DC, 4W, G4 bi-pin base. L1 ^{5/16} x Ø5/8" (L33 x Ø16mm)
	LS-G4-4W-SMD-3K		



Stem Height

Image	Code	Product	Description
	LS-PATH-18	18" Stem	Aluminum powder coated black, 18" (46cm). Includes an inground stake. Note: Custom stem heights available - MOQ required
	LS-PATH-ENG	22" Stem	Aluminum powder coated black, 22" (56cm). Includes an inground stake. Available by custom order - MOQ required







Cap

Image	Code	Product	Description
	LS-PATH-MO1	Modern 1	Aluminum powder coated black, Ø6 x H3 ^{1/4} " (Ø15 x H8cm).
	LS-PATH-MO2	Modern 2	Aluminum powder coated black, Wide light output, Ø6 ^{1/2} x H2" (Ø17 x H46cm).

Accessories

Image	Product	Code	Description
	100' Outdoor Wire	LS-OW-16-2-100	Outdoor wire for led lights. 16-2 AWG
	Outdoor Rated Marettes	LS-GEL-MAR	Outdoor rated, gel filled marettes ensure secure electrical connections in outdoor and wet conditions. Pack of 2.

Power Supplies

Image	Code	Voltage	Output Power	Class II	Dimmable Specs
Non-Dimmable					
	LS-12V-30W-O-CV	12V DC	Max. 30W	√	N/A
	LS-12V-60W-O-CV	12V DC	Max. 60W	√	N/A
	LS-12V-96W-O-CV	12V DC	Max. 96W	x	N/A
	LS-12AC-200W-LPS	12V AC	Max. 200W	x	Non dim outdoor transformer with built in photocell and timer
Dimmable					
	LS-12V-30D-MLT-CV	12V DC	Max. 30W	√	Triac/Phase. 0-10V, 1-10V, Potentiometer, 10V PWM 5 in 1 dimming
	LS-12V-60D-MLT-CV	12V DC	Max. 60W	√	Triac/Phase. 0-10V, 1-10V, Potentiometer, 10V PWM 5 in 1 dimming