

LENNOX LED SPOTLIGHT



This modern uplight offers high light output and a variety of beam degree options to fit your application. Great for garden and landscape lighting designs, it casts warm white LED light for easy integration.

Features

- Directly wire to 12V AC/*DC
- Die cast aluminum housing powder coated black
- Can be thread to standard round electrical junction box front plate
- Aluminum wall mount plate available
- Threaded 1/2" knuckle attaches to included stake or wall mount plate

Includes


Ground stake, LED uplight with 40° lens, extra 15° lens and white filter

Applications

Tree | Landscape | Garden

Installation

Inground stake or wall mount plate



90° Rotation of Uplight

Choose your direction of light output


Specifications

Voltage	12V AC/DC*	
Wattage	3W	6W
Lumens	255	485
Color Temp	2700K	2700K / 3000K / RGBW (5-wire)
# of LEDs	Integrated COB LED	
CRI	>85	
Lifespan	+50,000 hours	
Beam Angle	40° lens + 15° replaceable lens	
Working Temp	-25~+45°C (-4~113°F)	
IP	67	
Housing	Die Cast Aluminum	
Dimmable	Yes	
Wire Length	40" (100cm)	
Warranty	3-year	


Custom color temperatures available: 3000K, 4000K & 5000K

*DC is available in RGBW color temperature only

Finishes Available




Dimensions

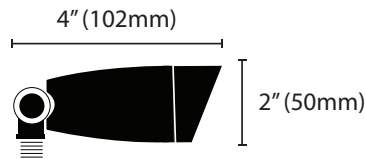

Choose from Spotlight or Floodlight



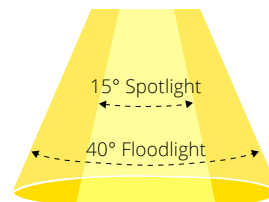



On site






Ordering Code

	Product	Wattage	Color Temp
3W Uplight	LS - <input type="text" value="SGUL"/>	- <input type="text" value="3W : 3 watts"/>	- <input type="text" value="27K : 2700K"/>
6W Uplight	LS - <input type="text" value="SGUL"/>	- <input type="text" value="6W : 6 watts"/>	- <input type="text" value="27K : 2700K"/> <input type="text" value="3K : 3000K"/> <input type="text" value="RGBW : Multi-color"/>

Power Supplies

Image	Code	Voltage	Output Power	Class II	Dimmable Specs
Non-Dimmable					
	LS-12V-30W-O-CV	12V	Max. 30W	√	N/A
	LS-12V-60W-O-CV	12V	Max. 60W	√	N/A
	LS-12V-96W-O-CV	12V	Max. 96W	x	N/A
	LS-12AC-200W-LPS	12V AC	Max. 200W	x	Non dim outdoor transformer with built in photocell and timer
Dimmable					
	LS-12V-30D-MLT-CV	12V	Max. 30W	√	Triac/Phase. 0-10V, 1-10V, Potentiometer, 10V PWM 5 in 1 dimming
	LS-12V-60D-MLT-CV	12V	Max. 60W	√	Triac/Phase. 0-10V, 1-10V, Potentiometer, 10V PWM 5 in 1 dimming

Accessories

Image	Product	Code	Description
	Wall Mount Plate	LS-SGUL-SM	Aluminum powder coated black, wall mount plate for uplight light engine.
	100' Outdoor Wire	LS-OW-16-2-100	Outdoor wire for led lights. 16-2 AWG
	Outdoor Rated Marettes	LS-GEL-MAR	Outdoor rated, gel filled marettes ensure secure electrical connections in outdoor and wet conditions. Pack of 2.