

HARDWIRE NON-DIMMABLE 60W CONSTANT VOLTAGE LED DRIVER



Commercial-grade, hardwire LED driver designed for constant-voltage lighting systems in architectural and commercial applications. Featuring universal high-voltage AC input, Class 2 output, and a sealed enclosure rated for dry, damp, and wet locations, this driver delivers dependable non-dimmable performance for permanent interior and exterior installations.

WATTAGE/VOLTAGE OPTIONS

- 60W (12V) - Class 2 | NON-Dimmable
- 60W (24V) - Class 2 | NON-Dimmable

Key Features


- Constant voltage output
- Universal input: 100-277V AC
- Built-in Power Factor Correction (PFC): PF > 0.98
- Efficiency: > 82%
- Short circuit, over-current, over-voltage, and over-temperature protection
- Hardwire installation
- Surface-mountable enclosure
- Designed for cooling via free air convection
- Rated for dry, damp, and wet locations
- UL / cUL Listed, Class 2



Specifications

Output Voltage	12V DC	24V DC
Output Power*	Max. 60W	
Amperage	2.5A	
Input Voltage	100-277V AC	
Input Frequency	50/60Hz	
Housing	Aluminum, fully potted	
Dimensions	L7 ^{3/8} x W3 ^{9/16} x H1 ^{9/16} " (L187 x W90 x H39mm)	
Operating Temp	-40°C~+90°C (-40~+194°F)	
Warranty	3 Years	

Dimensions

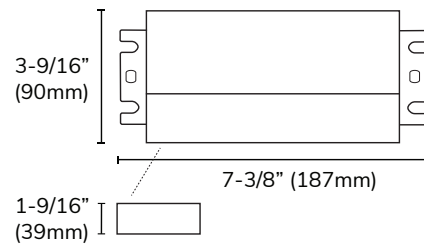

Ordering Codes

LS -	Voltage	-	Wattage	-	JB	-	O	-	Product
	<input type="text"/>		<input type="text"/>		<input type="text"/>		<input type="text"/>		<input type="text"/>
	12V : 12 Volt		60W : 60 Watt Output		JB : Junction Box		O : Outdoor		CV : Constant Voltage Driver
	24V : 24 Volt								