

Date:

Project:

Notes:

RF WIRELESS CONTROL SYSTEM

This control system controls single color LED lighting.

Features

- RF Dimmer remote and receiver (sold separately)
- Used with 12V or 24V systems
- Requires no additional wiring
- One dimmer can handle up to 96W
- Multiple remotes can pair to one receiver

Applications

Under Cabinet Lights | Flexible Strip Lights



MINI RF WALL MOUNT DIMMER


Features

- Single color RF wireless remote
- Controls 1 zone
- On/off and dimming (press button to dim up or dim down)
- Battery operated, requires no additional wiring
- Includes magnetic housing
- Multiple remotes can pair to one receiver , (can act as a 3 way dimmer)


Installation

Recess mount, cutout $\varnothing 1\frac{3}{8}"$ (35mm) / Surface mount with screws / Magnet

Dimensions

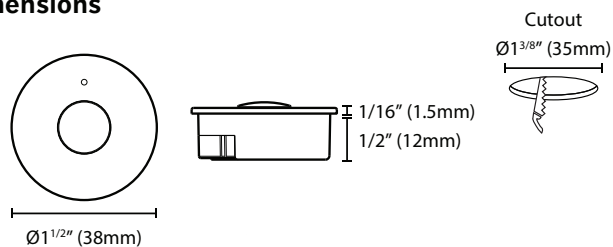

Product Code	LS-WM-DIM-RM
Input Voltage	3V (CR2025 battery)
Output Current	96W
Functions	On/off & Dimming: Quick press button to turn on and off. Hold to dim smoothly up or down.
Housing	Magnetic
Working Temp	0°C~+40°C
Warranty	3-year

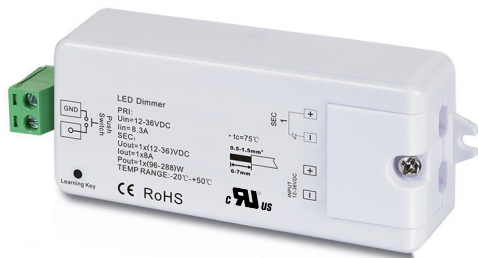

WALL MOUNT RECEIVER

Features

- Controls dimmer over 60' away
- Multiple receivers can pair to one remote

Installation

Surface mount, hardwire



Code	LS-RF-DIM-MWM
Input Voltage	12-36V DC
Output Current	1x8A/Channel
Output Power	12V: 96W, 24V: 192W
Output Type	Constant Voltage
Warranty	3-year

Up to 8 remotes can be paired with a single receiver. Unlimited receivers can be paired to 1 remote.

Dimensions

