


Date: _____ Project: _____

Notes: _____

INDOOR MULTI-ZONE RECEIVER

Compatible with Lumenstar's RF Multi-zone RGB / RGBW / CCT / SC Controllers to control low voltage LED lights.

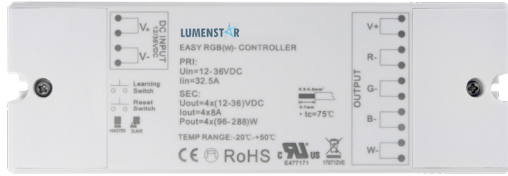


Features

- 12-36V DC constant voltage RF receiver
- Supports PWM signal control
- WiFi capable by app installed on iOS or Android devices
- Note: free control app included, **Easy Lighting**
- Multiple zones can be controlled separately or synchronously with endless receivers in each zone



Code	LS-RCV-MZ8A
Input Voltage	12-36V DC
Output Current	4x8A/Channel (32A)
Output Power	4x(96-288W)
Remote Range	15M (50')
Warranty	2-year

Dimensions

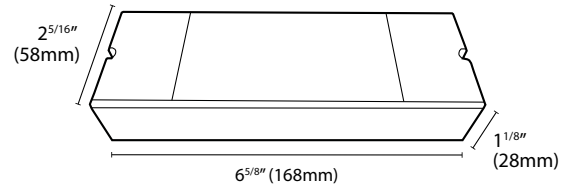

Control System

Product	Code	Remote Range	Functions
RGB Controller	LS-RGB-MZR	15M (50')	Multi-zone (4), 3 Presets, Dimming, Fade/Flash/Jump, Custom colors
RGBW Controller	LS-RGBW-MZR	15M (50')	Multi-zone (4), 3 Presets, Dimming, Fade/Flash/Jump, Custom colors
CCT Controller	LS-CCT-MZR	15M (50')	Multi-zone (4), 3 Presets, Dimming
Single Color Controller	LS-SC-MZR	15M (50')	Multi-zone (4), 3 Presets, Dimming
RGB/W Wall Mount	LS-RGB-MZWMR	15M (50')	Fits single gang box 3 Presets, Dimming, Fade/Flash, Custom colors, includes 6W driver
Single Color Wall Mount	LS-SC-MZWMR	15M (50')	Fits single gang box 3 Presets, Dimming, Fade/Flash, Custom colors, includes 6W driver