


Can be operated in one of 3 ways:

- 1) Touch control interface
- 2) Smart-phone or Tablet via downloadable app
- 3) Wireless remote

Product Code: LS-DMX-WC-RGBW

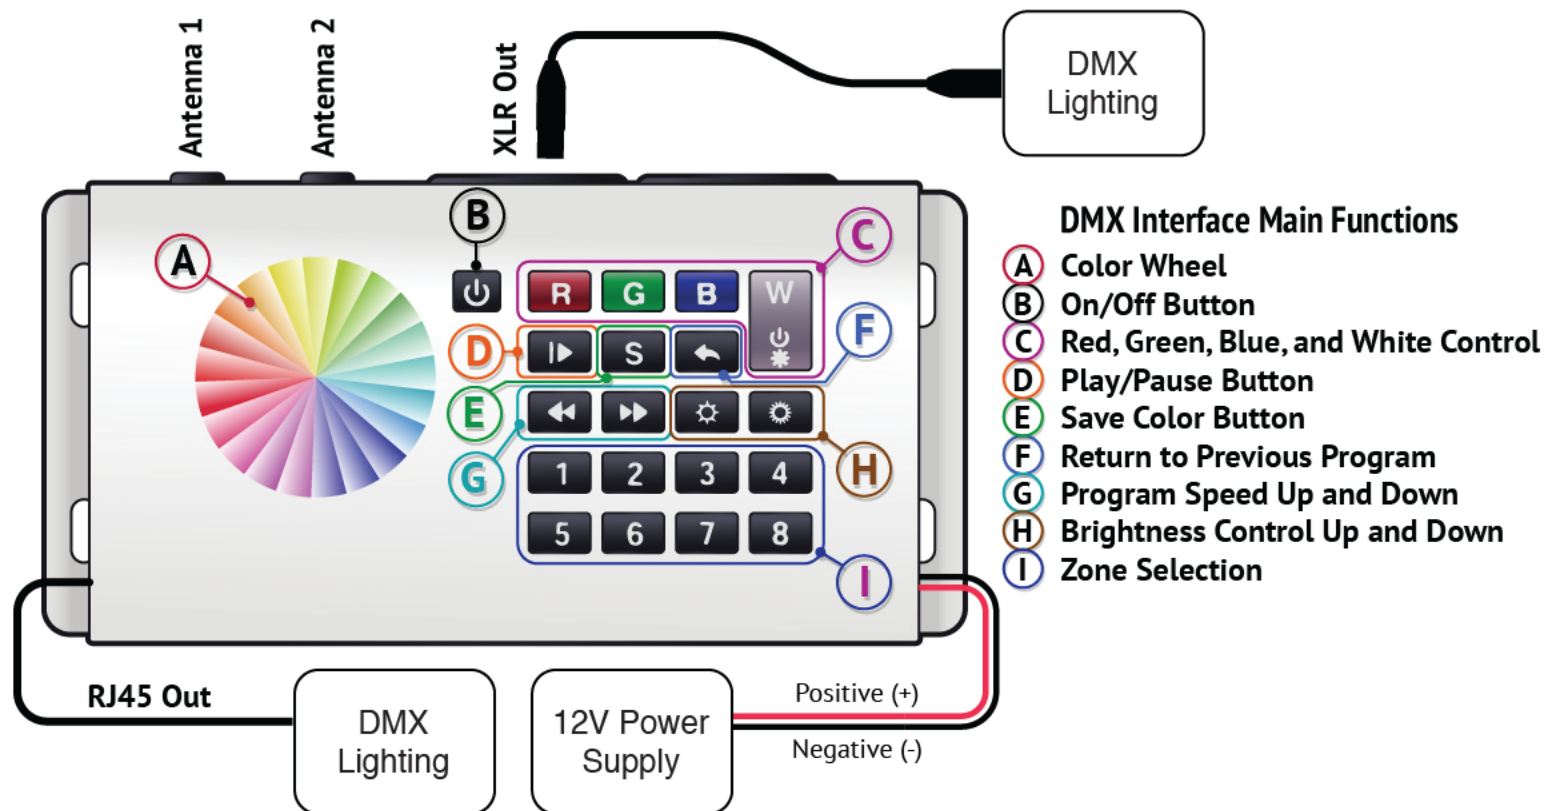

*For Wiring Examples, please see DMX System Installation Guide

RGBW Multi-zone Wireless Remote

Product Code: LS-RGBW-MZR

Wireless remote controller can be ordered separately to control DMX Interface.

**Pairing Smart Phone:**

Connect directly to receiver:

Step 1 – Download “Easy Lighting” app for Android or iOS**Step 2** – Wire receiver to power supply according to type of lights you are using (refer to wiring diagram).**Step 3** – Open WIFI connections on mobile device. Look for “Easy Lighting” and connect to “Easy Lighting network”.
Enter default password – 0123456789**Step 4** – Open “Easy Lighting” app, tap “Settings”. On receiver, tap “Learning Key” for 1 second then tap “Directly connect with WIFI LED Controller” in Easy Lighting app.**Step 5** – Tap the room on bottom bar of app and choose which room you would like to program the lights. Example: Bedroom, Living room etc – A green check-mark will appear in the top right corner of zone you select (the name and picture can be changed later) Then tap the room button again at the bottom of app and choose the controller wheel type: RGB / CCT or Single color.

Connect mobile device to lights directly:

Step 6 – To program app to work with receiver, press and hold learning button on receiver for 1 second and then touch color wheel on app, lights should blink and be able to be controlled by app on phone.

Connect receiver to WIFI network:

Step 7 – To connect receiver to WIFI network open Easy Lighting app. Tap settings, tap “Connect WIFI LED controller to your home network”. Tap on your network and enter credentials. Click yes. Your WIFI receiver will now be connected to you respective WIFI network.