

DIMMABLE LED POWER SUPPLY


Variety of dimmable LED power supplies offer smooth full range dimming performance.

Features

- Suitable for dry and damp locations
- Triac dimmable
- Smooth full-range dimming performance, compatibility with all classes of dimmers and controllers (Triac, ELV, MLV)
- Dimmable through line voltage, requires no minimum load
- Microprocessor controlled for smooth fade-on/off
- Direct wire hook-up installation
- Hardwire install

Wattage/Voltage Options


- 24W (12V / 24V) - Class 2
- 48W (12V / 24V) - Class 2
- 60W (12V / 24V) - Class 2

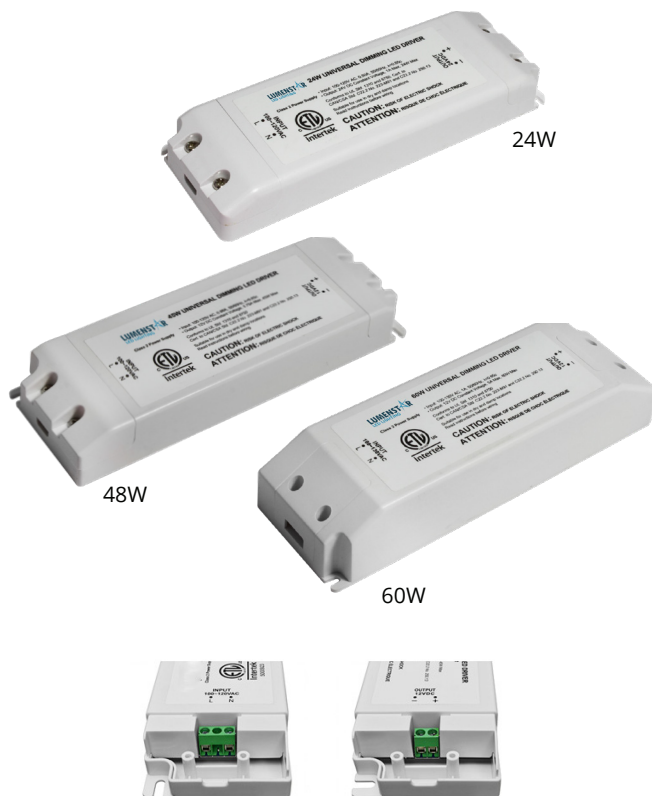


Output Voltage	12V DC			24V DC		
Output Power	24W	48W	60W	24W	48W	60W
Amperage	2A	4A	5A	1A	2A	2.5A
Input Voltage	120V AC					
Input Frequency	60Hz					
Housing	Polycarbonate plastic case					
Working Temp	-20°C~+40°C					
Warranty	3-year					

Dimensions


24W Dimmable Power Supply

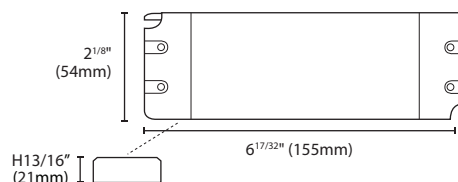

48W Dimmable Power Supply

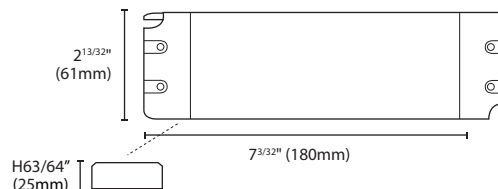

60W Dimmable Power Supply

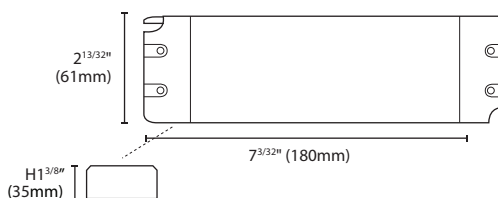

Ordering Codes

	Voltage		Wattage		Product
LS -		-		-	CV
	12V : 12 volts		24D : 24 watts dimmable		CV : Constant Voltage Driver
	24V : 24 volts		48D : 48 watts dimmable		
			60D : 60 watts dimmable		

Accessories

Image	Code	Product	Description
	LS-120V-SWITCH	8ft Plug with Rotary Switch	North American two prong plug with rotary switch, 120V, 2.4M (8') long cord.
	LS-JB-1	Junction Box	Fits 24W / 48W / 60W Dimmable power supplies. NEMA rated hardwire junction box, compatible with low voltage and triac dimmable power supplies. Dimensions: L330 x W76 x H38mm (L13 x W3 x H1 1/2")
	LS-WD-WT	Dimmer with Switch	120V AC, 60Hz , Single Pole, 150W output White Switch, dims 10-100%, fades up and down smoothly